

**Liquid-crystal medium,
and electro-optical display containing same**

5 The present invention relates to liquid-crystal displays, particularly active matrix addressed liquid-crystal displays (AMDs or AMLCDs), especially those which use an active matrix comprising thin film transistors (TFTs) or varistors. In addition, the present application relates to liquid-crystal media for use in displays of this type. AMDs of this type are able to use various active electronic switching elements. The most widespread are displays
10 which use three-pole switching elements. These are also preferred in the present invention. Examples of three-pole switching elements of this type are MOS (metal oxide silicon) transistors or the above-mentioned TFTs or varistors. In the TFTs, various semiconductor materials, predominantly silicon or alternatively cadmium selenide, are used. In particular, poly-
15 crystalline silicon or amorphous silicon is used. In contrast to the three-pole electronic switching elements, matrixes of 2-pole switching elements, such as, for example, MIM (metal insulator metal) diodes, ring diodes or "back to back" diodes, can also be employed in AMDs. However, as also explained in greater detail below, these are generally not preferred owing
20 to the worse electro-optical properties achieved by the AMDs.

The liquid crystals used as dielectrics in liquid-crystal displays of this type are those whose optical properties change reversibly on application of an electric voltage. Electro-optical displays which use liquid-crystals as media
25 are known to the person skilled in the art. These liquid-crystal displays use various electro-optical effects.

The most widespread conventional displays use the TN effect (twisted nematic, having a nematic structure which is twisted by about 90°), the
30 STN effect (supertwisted nematic) or the SBE effect (supertwisted birefringence effect). In these and similar electro-optical effects, liquid-crystalline media of positive dielectric anisotropy ($\Delta\epsilon$) are used.

Since the operating voltage in displays in general, i.e. including in displays
35 using these effects, should be as low as possible, use is made of liquid-crystal media of large dielectric anisotropy, which are generally composed

predominantly of dielectrically positive liquid-crystal compounds and at most comprise relatively small/low proportions of dielectrically neutral compounds.

5 In contrast to the conventional displays utilizing electro-optical effects which require liquid-crystal media of positive dielectric anisotropy, there are other electro-optical effects which use liquid-crystal media of negative dielectric anisotropy, such as, for example, the ECB effect (electrically controlled birefringence) and its sub-forms DAP (deformation of aligned phases), VAN (vertically aligned nematics) and CSH (colour super homeotropics). These are the subject-matter of the present application.

10 The IPS (in plane switching) effect, which has been employed to an increased extent recently, can use both dielectrically positive and dielectrically negative liquid-crystal media, similarly to "guest/host" displays, which can employ dyes either in dielectrically positive or in dielectrical negative media, depending on the display mode used. In the case of the liquid-crystal displays mentioned in this paragraph, those which use dielectrically negative liquid-crystal media are also the subject-matter of the present application.

15 A further highly promising type of liquid-crystal display are so-called "axially symmetric microdomain" (abbreviated to ASM) displays, which are preferably addressed by means of plasma arrays (plasma addressed liquid cystal displays, or PA LCDs). These displays are also the subject-matter of the present application.

20 The liquid-crystal media employed in the above-mentioned liquid-crystal displays and all liquid-crystal displays which utilize similar effects generally consist predominantly and in most cases even very substantially of liquid-crystal compounds having the corresponding dielectric anisotropy, i.e. of compounds of positive dielectric anisotropy in the case of dielectrically positive media and of compounds of negative dielectric anisotropy in the case of dielectrically negative media.

35

In the media used in accordance with the present application, at most significant amounts of dielectrically neutral liquid-crystal compounds and in general only very small amounts or even no dielectrically positive compounds at all, are typically employed, since in general the liquid-crystal displays should have the lowest possible addressing voltages. For this reason, liquid-crystal compounds having the opposite sign of the dielectric anisotropy to the dielectric anisotropy of the medium are generally employed extremely sparingly or not at all.

The liquid-crystal media of the prior art have relatively low low-temperature stabilities. Thus, the nematic phases often extend only down to -20°C and in some cases even only down to -10°C . In addition, the threshold voltages (V_0) are at the same time relatively high, in most cases even greater than 2 V.

For the most part, the liquid-crystal media of the prior art have relatively unfavourable values for Δn , which are often greater than 0.10. However, such large Δn values are not particularly advantageous for VAN displays, since small values for the optical retardation are typically used in VAN displays. Thus, for example, a $d \cdot \Delta n$ of approximately $0.30 \mu\text{m}$ is employed in the case of an untwisted director orientation or a $d \cdot \Delta n$ of approximately $0.40 \mu\text{m}$ is employed with a 90° twist. Such large Δn values require the realization of very small layer thicknesses, which, although favorable for the response times observed, result, however, in low production yields.

In most cases, the most favorable Δn values for practical displays are in the range from 0.07 to 0.12. This also applies to IPS displays.

In addition, the response time of the prior-art displays is often inadequately long, in particular for video-capable displays. Thus, the viscosities of the liquid-crystal media must be improved, i.e. reduced. This applies in particular to the rotational viscosity and very particularly at low temperatures. A reduction in the flow viscosity generally results, in particular in the case of displays having a homeotropic edge alignment of the liquid crystals (for example in ECB and VAN displays), in a shortening of the filling times during production of the displays.

Thus, there has been and continues to be a great demand for liquid-crystal media which do not have the disadvantages of the media from the prior art or at least do so to a significantly reduced extent.


5

Surprisingly, it has been found that this is achieved by the liquid-crystal media according to the invention. These media comprise

10


- a) a dielectrically negative, liquid-crystalline component (component A) which comprises one or more dielectrically negative compound(s) of the formula I

15




in which

20

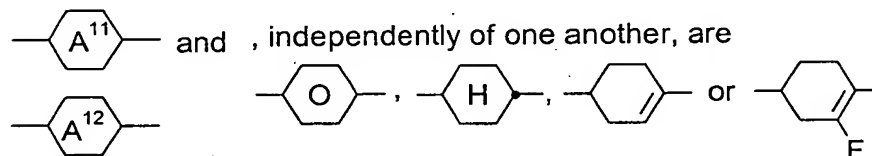

25

preferably, independently of one another, are



particularly preferably

30



35

R^{11} is alkyl having from 1 to 7 carbon atoms, preferably n-alkyl, particularly preferably n-alkyl having from 1 to 5 carbon atoms, alkoxy having from 1 to 7 carbon atoms, preferably n-alkoxy, particularly preferably

n-alkoxy having from 1 to 5 carbon atoms, or alkoxy-alkyl, alkenyl or alkenyloxy having from 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms, preferably alkenyloxy,



R^{12} is alkyl or alkoxy having from 1 to 7 carbon atoms, preferably alkoxy, preferably n-alkoxy and particularly preferably n-alkoxy having from 2 to 5 carbon atoms, or alkoxyalkyl, alkenyl or alkenyloxy having from 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms, preferably alkenyloxy,

one of Z^{11} and Z^{12} is OCF_2 or CF_2O and the other is a single bond, and

n is 0 or 1,

and

b) a dielectrically negative, liquid-crystalline component (component B), which preferably comprises one or more dielectrically negative compound(s) selected from the group consisting of the compounds of the formulae II and III



in which

R^{21} is alkyl having from 1 to 7 carbon atoms, preferably n-alkyl and particularly preferably n-alkyl having from 1 to 5 carbon atoms, alkoxy having from 1 to 7 car-


bon atoms, preferably n-alkoxy and particularly preferably n-alkoxy having from 2 to 5 carbon atoms, or alkoxyalkyl, alkenyl or alkenyloxy having from 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms, preferably alkenyloxy,

R^{22}



is alkyl having from 1 to 7 carbon atoms, preferably n-alkyl, particularly preferably n-alkyl having from 1 to 3 carbon atoms, alkoxy having from 1 to 7 carbon atoms, preferably n-alkoxy, particularly preferably n-alkoxy having from 2 to 5 carbon atoms, or alkenyloxy having from 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms,

Z^{21} and Z^{22}



are each, independently of one another, $-CH_2-CH_2-$, $-CH=CH-$, $-C\equiv C-$, $-COO-$ or a single bond, preferably $-CH_2-CH_2-$ or a single bond and particularly preferably a single bond,





are each, independently of one another,

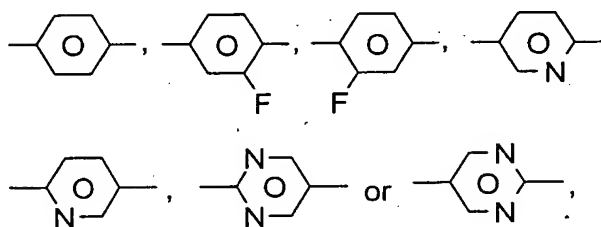

preferably



and, if present,




L^{21} and L^{22}


are both C-F or one of the two is N and the other is C-F, preferably both are C-F, and

m


is 0 or 1,




and



are each, independently of one another, as defined above for



and



respectively in the case of the formula II,

Z^3

is $-\text{CH}_2-\text{CH}_2-$, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{COO}-$ or a single bond, preferably $-\text{CH}_2-\text{CH}_2-$ or a single bond and particularly preferably a single bond,

R^{31} and R^{32}


are each, independently of one another, alkyl having from 1 to 7 carbon atoms, preferably n-alkyl and particularly preferably n-alkyl having from 1 to 5 carbon atoms, alkoxy having from 1 to 7 carbon atoms, preferably n-alkoxy and particularly preferably n-alkoxy having from 2 to 5 carbon atoms, or alkenyloxy having 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms, and

l

is 1 or 2,

and optionally

- c) a dielectrically neutral component (component C) which comprises one or more dielectrically neutral compound(s) of the formula IV



5




in which

R^{41} and R^{42} are each, independently of one another, as defined above for R^{21} in the case of the formula II,

10

Z^{41} , Z^{42} and Z^{43} are each, independently of one another, $-\text{CH}_2\text{CH}_2-$, $-\text{CH}=\text{CH}-$, $-\text{COO}-$ or a single bond,

15




and


20



are each, independently of one another,



25

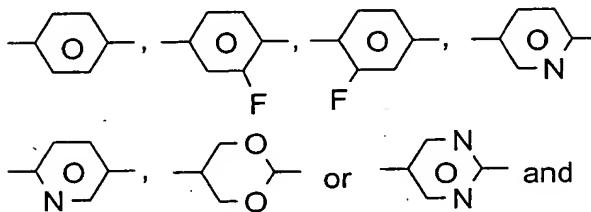





30

o and p , independently of one another, are 0 or 1,



the variables in formula IV are preferably

35


R^{41} and R^{42} are each, independently of one another, alkyl or alkoxy having 1-5 carbon atoms or alkenyl having 2-5 carbon atoms,





are each, independently of one another,



and very particularly preferably at least two of these rings




where two adjacent rings are very particularly preferably linked directly to one another, preferably



and optionally



d) one or more dielectric positive compound(s) of the formula V

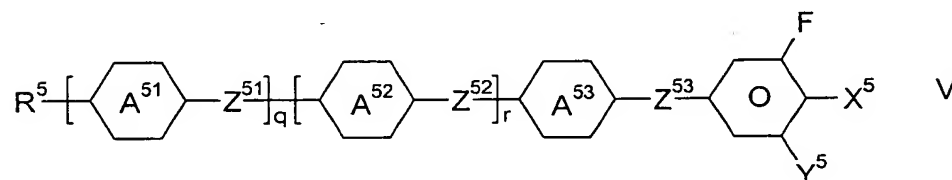


in which

R^5 is alkyl or alkoxy having from 1 to 7 carbon atoms, or alkoxyalkyl, alkenyl or alkenyloxy having from 2 to 7 carbon atoms,



Z^{51} , Z^{52} and Z^{53} are each, independently of one another, $-\text{CH}_2\text{CH}_2-$, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{COO}-$ or a single bond,



and



are each, independently of one another,

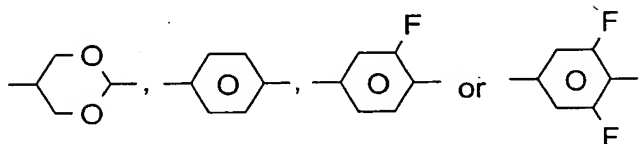


X^5 is F, OCF_2H or OCF_3 , and

Y^5 is H or F, preferably F in the case where $X = \text{F}$ or OCF_2H , and

q and r are each, independently of one another, 0 or 1.

In a further preferred embodiment, the medium comprises one or more dielectrically negative compounds of the formula VI



VI

in which


R^{61} and R^{62} are alkyl having from 1 to 7 carbon atoms, preferably n-alkyl and particularly preferably n-alkyl having from 1 to 5 carbon atoms, alkoxy having from 1 to 7 carbon atoms, preferably n-alkoxy and particularly preferably n-alkoxy having from 2 to 5 carbon atoms, or alkenyloxy having from 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms, very particularly preferably both are n-alkoxy having from 1 to 5 carbon atoms,

Z^6 is as defined above for Z^{21} in the case of the formula II,

L^{61} and L^{62} are both C-F or one of the two is N and the other is C-F, and

L^{63} and L^{64} are both C-F or one of the two is N and the other is C-F.

In a further preferred embodiment, the medium comprises one or more dielectrically negative compounds of the formula VII







in which



R^{71} and R^{72} are alkyl having from 1 to 7 carbon atoms, preferably n-alkyl and particularly preferably n-alkyl having from 1 to 5 carbon atoms, alkoxy having from 1 to 7 carbon atoms, preferably n-alkoxy and particularly preferably n-alkoxy having from 2 to 5 carbon atoms, or alkenyloxy having from 2 to 7 carbon atoms, preferably having from 2 to 4 carbon atoms, very particular-

ly preferably both are n-alkoxy having from 1 to 5 carbon atoms, and

L^{71} and L^{72} are both C-F or one of the two is N and the other is C-F.

Component A preferably consists predominantly, particularly preferably consists essentially completely and very particularly preferably consists virtually completely, of one or more compounds of the formula I. These compounds of the formula I are preferably selected from the group consisting of the compounds of the formulae I-1 to I-8;
















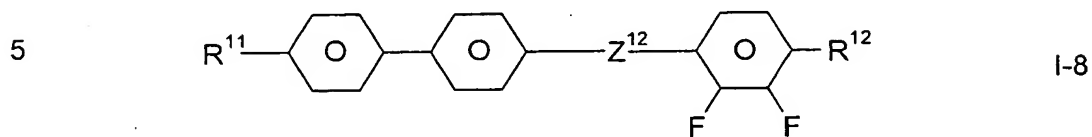




in which

R^{11} , R^{12} and Z^{12} are each as defined above under the formula I.

The compounds of the formula I are particularly preferably selected from the group consisting of the compounds of the following sixteen formulae I-1a to I-8b:



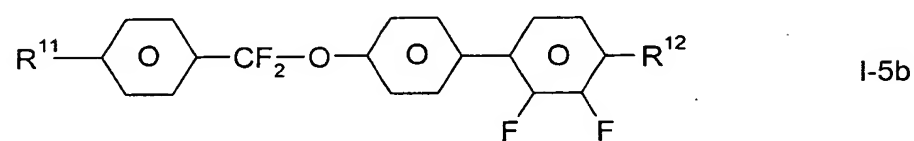



5 in which

10 R^{11} and R^{12} are as defined above under the formula I, and R^{11} is preferably alkyl having from 1 to 7 carbon atoms or alkenyl having from 2 to 7 carbon atoms, and R^{12} is preferably alkoxy having from 1 to 7 carbon atoms or alkenyloxy having from 2 to 7 carbon atoms.

15 The compounds are very particularly preferably selected from the group consisting of the compounds of the formulae I-1a, I-1b, I-2a, I-3a, I-4a, I-4b, I-5a, I-6a, I-6b and I-7a and in particular from the group consisting of the compounds of the formulae I-1b and I-7a.

20 In the present application, in connection with the quoting of the constituents of the compositions:




- comprise means that the concentration of the relevant constituents in the composition is preferably 10% or more, particularly preferably 20% or more,
- consist predominantly of means that the concentration of the relevant constituents in the composition is preferably 50% or more, particularly preferably 55% or more and very particularly preferably 60% or more,
- consist essentially completely of means that the concentration of the relevant constituents in the composition is preferably 80% or more, particularly preferably 90% or more and very particularly preferably 95% or more, and
- consist virtually completely of means that the concentration of the relevant constituents in the composition is preferably 98% or more, particularly preferably 99% or more and very particularly preferably 100.0%.

35 This applies both to the media as compositions with their constituents, which may be components and compounds, and to the components with their constituents, those of the compounds.

The liquid-crystal media preferably comprise one or more compounds selected from the group consisting of the compounds of the formulae I-1, I-2 and I-4, particularly preferably of the formulae I-2 and/or I-4.

Component B preferably consists predominantly, particularly preferably consists essentially completely and very particularly preferably consists virtually completely, of one or more compounds selected from the group consisting of the compounds of the formulae II and III.

The compounds of the formula II are preferably selected from the group consisting of the compounds of the formulae II-1 to II-3



in which

R^{21} and R^{22} are as defined above under the formula I, and


R^{21} is preferably n-alkyl having from 1 to 7 carbon atoms, n-alkoxy having from 1 to 7 carbon atoms or alkenyloxy having from 2 to 7 carbon atoms, and

R^{22} is preferably n-alkoxy having from 1 to 7 carbon atoms or alkenyloxy having from 2 to 7 carbon atoms,

and in the formulae I2 and I3 is alternatively n-alkyl having from 1 to 7 carbon atoms,


in which

5



preferably

10




n

is 0 or 1.


The compounds of the formula III are preferably selected from the group consisting of the compounds of the formulae III-1 and III-2:

15



III-1

20



III-2


in which

25

R^{31} and R^{32} are as defined above under the formula III and are preferably n-alkyl.






The liquid-crystal media particularly preferably comprise one or more compounds selected from the group consisting of the compounds of the formulae II-1a to II-1f:

30




II-1a

35

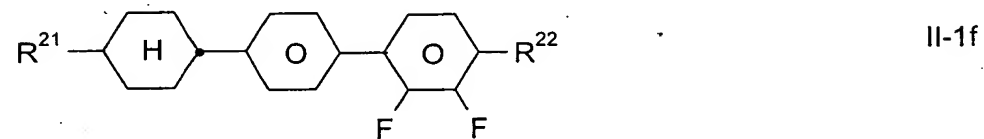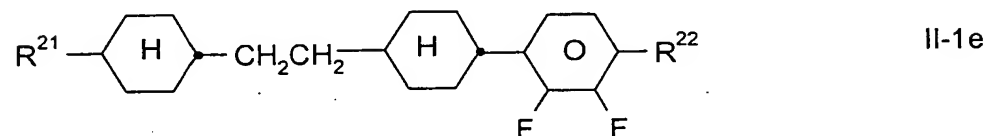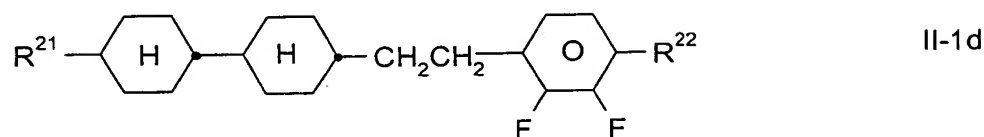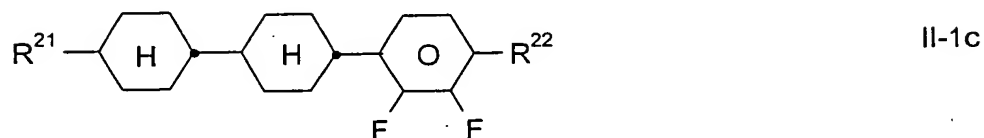
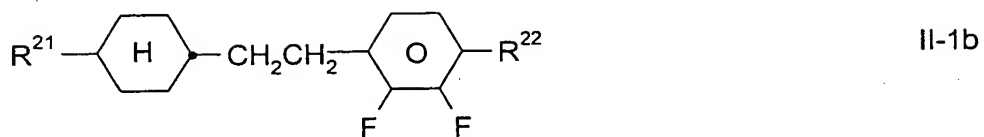


in which R^{21} and R^{22} are as defined above in the case of the formula II and are preferably as defined above in the case of the formula II-1.

The liquid-crystal media particularly preferably comprise one or more compounds selected from the group consisting of the compounds of the formulae II-2a to II-2c:

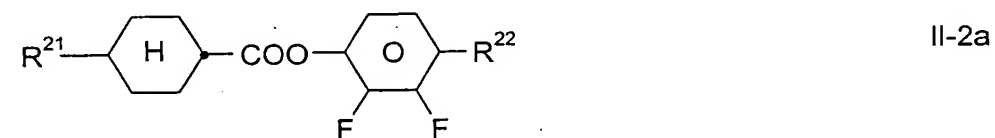


35

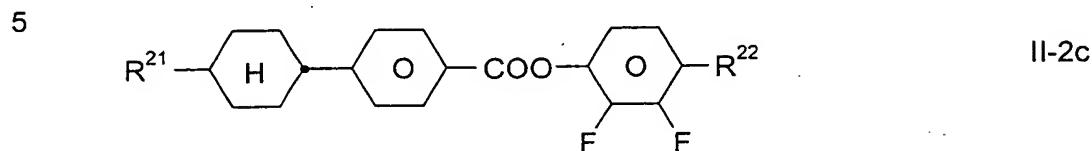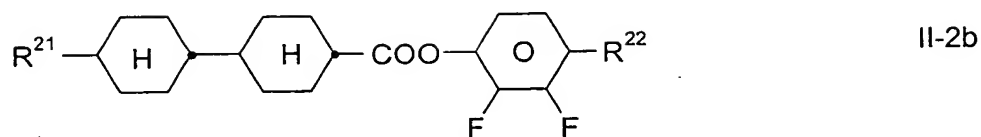



10 in which R^{21} and R^{22} are as defined above in the case of the formula II and are preferably as defined above in the case of the formula II-2.


The liquid-crystal media particularly preferably comprise one or more compounds of the formula II-3a

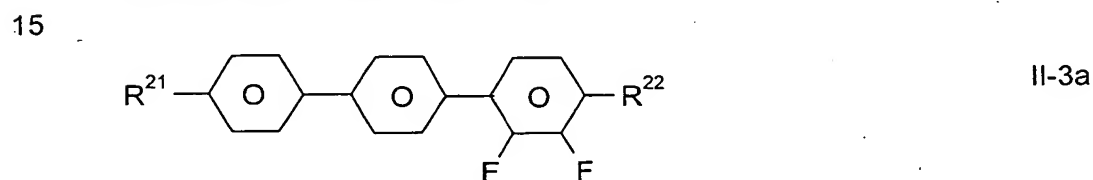

20 in which R^{21} and R^{22} are as defined above in the case of the formula II and are preferably as defined above in the case of the formula II-3.

25 Component C preferably consists predominantly, particularly preferably consists essentially completely and very particularly preferably consists virtually completely, of one or more compounds of the formula IV. These compounds of the formula IV are preferably selected from the group consisting of the compounds of the formulae IV-1 to IV-3:











5 in which R^{41} , R^{42} , Z^{41} , Z^{42} , $\text{C}_6\text{H}_4(A^{42})$ and $\text{C}_6\text{H}_4(A^{43})$ are each as


correspondingly defined above in the case of the formula IV.

10 The liquid-crystal medium especially preferably comprises one or more compounds selected from the group consisting of the compounds of the formulae IV-1a to IV-1d, IV-1e, IV-2a to IV-2e and IV-3a to IV-3c:




in which n and m are each, independently of one another, from 1 to 5, and o and p are each, independently thereof and from one another, from 0 to 3,







IV-2b




IV-2c




IV-2d




IV-2e




IV-2e

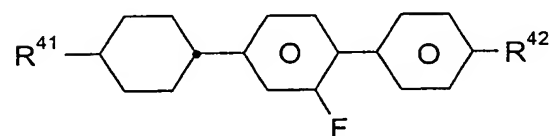


IV-2f




IV-3a



IV-3b







IV-3c




IV-3d

in which R^{41} and R^{42} are each as defined above under the formula IV1, and the phenyl rings may optionally be fluorinated, but not in such a way that the compounds are identical with those of the formula II and its sub-formulae. R^{41} is preferably n-alkyl having from 1 to 5 carbon atoms, particularly preferably having from 1 to 3 carbon atoms, and R^{42} is preferably n-alkyl or n-alkoxy having from 1 to 5 carbon atoms or alkenyl having from 2 to 5 carbon atoms. Of these, particular preference is given to the compounds of the formulae IV1a to IV1d.

Component D preferably consists predominantly, particularly preferably consists essentially completely and very particularly preferably consists virtually completely, of one or more compounds of the formula IV. These compounds of the formula IV are preferably selected from the group consisting of the compounds of the formulae V-1 to V-4:

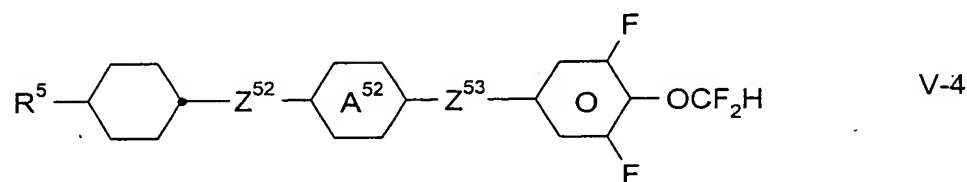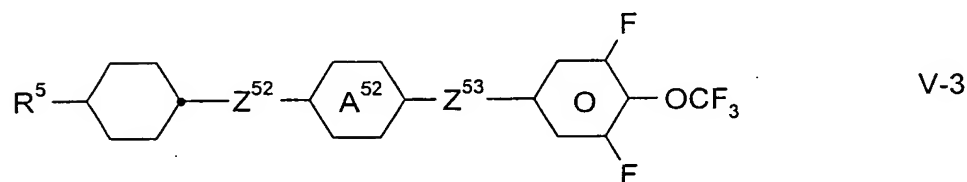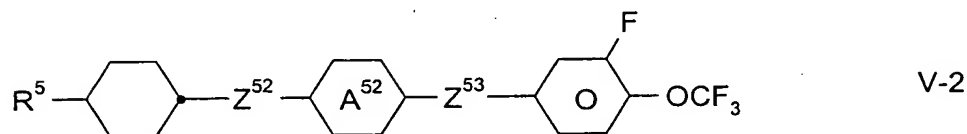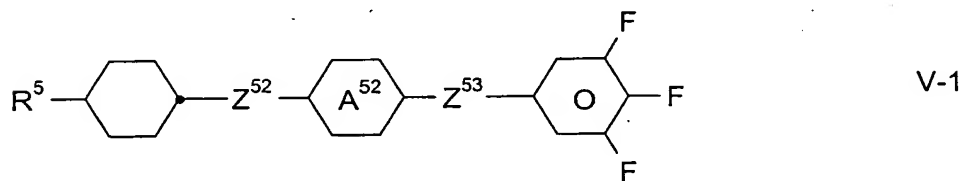

in which R^5 , Z^{52} , Z^{53} and  are as defined above for the


formula V, but preferably

5

R^5 is alkyl having 1-7 carbon atoms or alkenyl having 2-7 carbon atoms, preferably vinyl or 1E-alkenyl,

one of

10 Z^{52} and Z^{53} is a single bond and the other is $-\text{CH}_2\text{CH}_2-$, $-\text{COO}-$ or a single bond and



In a preferred embodiment, the medium comprises one or more compounds of the formula VI, preferably selected from the group consisting of the compounds of the formulae VI-1 to VI-4:

20



25



30




35



in which R^{61} and R^{62} are as defined above in the case of the formula VI.

In a preferred embodiment, the medium comprises one or more compounds of the formula VII, preferably from the group consisting of the formula VII-1

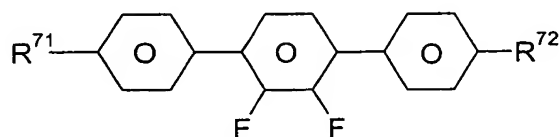

VII-1

10 in which

R⁷¹ and R⁷² are as defined above in the case of the formula VII.

15 In a preferred embodiment, the liquid-crystal media according to the invention comprise in total, based on the mixture as a whole,

from 5% to 85%, preferably from 10% to 55% and particularly preferably from 15% to 40%, of component A, preferably of compounds of the formula I,

20 from 5% to 85%, preferably from 10% to 85%, particularly preferably from 20% to 80% and very particularly preferably from 40% to 75%, of component B, preferably of compounds of the formulae II and III, where the ratio of the concentrations of compounds II and III is preferably greater than or equal to 2:1, particularly preferably greater than or equal to 3:1 and very particularly preferably greater than or equal to 4:1,

25 from 0% to 50%, preferably from 0% to 40%, particularly preferably from 0% to 30% and very particularly preferably from 5% to 25%, of component C, preferably of compounds of the formula IV, and

30 from 0% to 40%, preferably from 0% to 30%, particularly preferably from 0% to 20%, and very particularly preferably from 1% to 15%, of component D, preferably of compounds of the formula IV.

35

Here, as throughout the present application, the term compounds, also written as compound(s), means both one and a plurality of compounds, unless explicitly stated otherwise.

5 The individual compounds are employed here in concentrations of in each case from 1% to 30%, preferably from 2% to 30% and particularly preferably from 4% to 16%. An exception is formed here by compounds having three phenyl rings and compounds having four six-membered rings. These compounds are employed in concentrations of in each case from 0.5% to 10
10 15%, preferably from 1% to 10% and particularly preferably from 1% to 8% per individual compound. In the case of compounds of the formula I in which $n = 0$, the preferred limits to the concentrations for the proportion of the individual compounds in the medium are from 1% to 20%, preferably from 2% to 15% and particularly preferably from 5% to 8%. In the case of 15 the compounds of the formula I in which $n = 1$, the preferred limits to the concentrations for the proportion of the individual compounds in the medium are from 1% to 30%, preferably from 2% to 20% and particularly preferably from 8% to 12%.

20 In a preferred embodiment, the liquid-crystal media particularly preferably comprise in total

from 10% to 40% of compounds of the formula I,
from 50% to 90% of compounds of the formulae II and III,
25 from 0% to 40% of compounds of the formula IV, and
from 0% to 20% of compounds of the formula V.

In this embodiment, the liquid-crystal media very particularly preferably comprise in total

30 from 15% to 35% of compounds of the formula I,
from 60% to 80% of compounds of the formulae II and III,
from 0% to 20% of compounds of the formula IV and
from 0% to 5% of compounds of the formula V.

35

In a particularly preferred embodiment, which may be identical and preferably is identical with the preferred embodiments described above for the preferred concentration ranges, the liquid-crystal media comprise:

- 5 • one or more compounds of the formula I, preferably selected from the group consisting of the compounds of the formulae I-1b and I-7a, preferably in which R^{11} is n-alkyl and R^{12} is alkoxy, and
- one or more compounds of the formula II-1, preferably
- 10 - one or more compounds of the formula II-1a, and/or, preferably and,
- one or more compounds of the formula II-1c, and/or, preferably and,
- one or more compounds of the formula III-1, and/or, preferably and,
- one or more compounds selected from the group consisting of the compounds of the formulae IV-1 to IV-4, preferably
- 15 - one or more compounds of the formula IV-1 selected from the group consisting of the compounds of the formulae IV-1a to IV-1d, very particularly preferably selected from the group consisting of the formulae IV-1c and IV-1d and in particular of the formula IV-1c, and/or, preferably and,
- 20 - one or more compounds of the formula IV-2c and/or IV-2e, and/or, preferably and,
- one or more compounds of the formula IV-3c and/or IV-3d, and/or, preferably and,
- 25 - one or more compounds of the formula IV-4, and/or
- one or more compounds selected from the group consisting of the compounds of the formulae V to VII.

30

Particular preference is given here to liquid-crystal media which comprise

35

- one or more compounds of the formula I, preferably selected from the group consisting of the compounds of the formulae I-1b and I-7a, preferably in which R^{11} is n-alkyl and R^{12} is alkoxy, and in particular in each case in concentrations of from 6% to 20% per compound, and/or

- 5 - one or more compounds of the formula II-1a, in particular in each case in concentrations of from 4% to 18% per compound, and/or
- 10 - one or more compounds of the formula II-1c, in particular in each case in concentrations of from 3% to 15% per compound, preferably in each case one or more compounds in which R^{21} is alkyl having from 1 to 3 carbon atoms and R^{22} is alkoxy having from 1 to 3 carbon atoms, and in which R^{21} is alkyl having from 1 to 3 carbon atoms and R^{22} is alkyl having from 1 to 3 carbon atoms, and/or
- 15 - one or more compounds of the formula IV-1, preferably of the formulae IV-1b and/or IV-1c.
- 20 These media may, if desired, comprise one or more compounds selected from the group consisting of the compounds of the formulae V-1 to V-4.
- 25 The liquid-crystal media according to the invention preferably have nematic phases of in each case from -20°C to 70°C , particularly preferably from -30°C to 80°C and very particularly preferably from -40°C to 90°C and most preferably from -40°C to 105°C .
- 30 The term "have a nematic phase" here means firstly that no smectic phase and no crystallisation are observed at low temperatures at the corresponding temperature and secondly also that no clearing occurs on heating from the nematic phase. The investigation at low temperatures is carried out in a flow viscometer at the corresponding temperature and checked by storage for at least 100 hours in test cells having a layer thickness corresponding to the electro-optical application. At high temperatures, the clearing point is measured in capillaries by conventional methods.
- 35 Furthermore, the liquid-crystal media according to the invention are characterised by relatively low optical anisotropy values. The birefringence values are preferably in the range from 0.060 to 0.150, particularly preferably in the range from 0.070 to 0.120 and very particularly preferably in the range from 0.070 to 0.110.


In addition, the liquid-crystal media according to the invention have relatively low values for the threshold voltage (V_0) of less than or equal to 2.2 V, preferably less than or equal to 2.0 V, particularly preferably less than or equal to 1.9 V and very particularly preferably less than or equal to 1.85 V. In a particularly preferred embodiment, the liquid-crystal media according to the invention have values for the threshold voltage which are less than or equal to 1.5 V.

These preferred values for the individual physical properties are also observed in each case in combination with one another.

Independently of the above-mentioned dimensioning limits for the compounds of the formulae I, II and III, compounds of the formulae I and II are employed in the liquid-crystal media in accordance with the present invention in a concentration of up to about 25% per individual substance, and compounds of the formula III are employed in a concentration of up to about 20%, preferably up to 16%, per individual substance. Compounds of the formula I-1 are preferably employed in concentrations of up to about 20%, preferably up to 15%, per individual substance.

In the present application, " \leq " means less than or equal to, preferably less than, and " \geq " means greater than or equal to, preferably greater than.

In the present application,



denote trans-1,4-cyclohexylen.

In the present application, the term dielectrically positive compounds means compounds having a $\Delta\epsilon$ of > 1.5 , dielectrically neutral compounds means those in which $-1.5 \leq \Delta\epsilon \leq 1.5$, and dielectrically negative compounds means those having a $\Delta\epsilon < -1.5$. The dielectric anisotropy of the compounds is determined here by dissolving 10% of the compounds in a liquid-crystalline host and determining the capacitance of this mixture at 1 kHz in at least one test cell having a thickness of 20 μm with a homeo-

5

10

15

20

25

30

26. **Answer: D** The correct answer is D. The correct answer is D.

100221-2200T
The liquid-crystal media according to the invention may, if necessary, also comprise further additives and chiral dopants in the conventional amounts. The amount of these additives employed is in total from 0% to 10%, based on the amount of the mixture as a whole, preferably from 0.1% to 6%. The concentrations of the individual compounds employed are preferably from 0.1 to 3%. The concentration of these and similar additives is not taken into account when indicating the concentrations and the concentration ranges of the liquid-crystal compounds in the liquid-crystal media.

The compositions consist of a plurality of compounds, preferably from 3 to 30, particularly preferably from 6 to 20 and very particularly preferably from 10 to 16 compounds, which are mixed in a conventional manner. In general, the desired amount of the components used in smaller amount is dissolved in the components making up the principal constituent, advantageously at elevated temperature. If the selected temperature is above the clearing point of the principal constituent, the completion of the dissolution process is particularly easy to observe. However, it is also possible to prepare the liquid-crystal mixtures in other conventional ways, for example using premixes or from a so-called "multibottle system".

By means of suitable additives, the liquid-crystal phases according to the invention can be modified in such a way that they can be employed in any type of ECB, VAN, IPS, GH or ASM-PA LCD display that has been disclosed hitherto.

The entire disclosure[s] of all applications, patents and publications, cited above or below, and of corresponding German application No.10063943.7, filed December 20, 2000, is hereby incorporated by reference.

Examples

The examples below serve to illustrate the invention without representing a limitation. In the examples, the melting point T (C,N), the transition from the smectic (S) phase to the nematic (N) phase T(S,N) and the clearing point T (N,I) of a liquid-crystal substance are indicated in degrees Celsius.

Unless explicitly stated otherwise, the percentages above and below are per cent by weight, and the physical properties are the values at 20°C, unless explicitly stated otherwise.

5

All the indicated values for temperatures in this application are °C and all temperature differences are correspondingly differential degrees, unless explicitly stated otherwise.

10

In the present application and in the examples below, the structures of the liquid-crystal compounds are indicated by means of acronyms, the transformation into chemical formulae taking place in accordance with Tables A and B below. All radicals C_nH_{2n+1} and C_mH_{2m+1} are straight-chain alkyl radicals having n and m carbon atoms respectively. The coding in Table B is self-evident. In Table A, only the acronym for the parent structure is indicated. In individual cases, the acronym for the parent structure is followed, separated by a hyphen, by a code for the substituents R_1 , R_2 , L_1 and L_2 :

15

20

25

30

35

T0027-22001

	Code for R1, R2, L1, L2, L3	R1	R2	L1	L2	L3
5	nm	C_nH_{2n+1}	C_mH_{2m+1}	H	H	H
	nOm	C_nH_{2n+1}	OC_mH_{2m+1}	H	H	H
	nO.m	OC_nH_{2n+1}	C_mH_{2m+1}	H	H	H
	nmFF	C_nH_{2n+1}	C_mH_{2m+1}	H	F	F
	nmOFF	C_nH_{2n+1}	OC_mH_{2m+1}	H	F	F
10	n	C_nH_{2n+1}	CN	H	H	H
	nN.F	C_nH_{2n+1}	CN	F	H	H
	nN.F.F	C_nH_{2n+1}	CN	F	F	H
	nF	C_nH_{2n+1}	F	H	H	H
15	nF.F	C_nH_{2n+1}	F	F	H	H
	nF.F.F	C_nH_{2n+1}	F	F	F	H
	nOF	OC_nH_{2n+1}	F	H	H	H
	nCl	C_nH_{2n+1}	Cl	H	H	H
20	nCl.F	C_nH_{2n+1}	Cl	F	H	H
	nCl.F.F	C_nH_{2n+1}	Cl	F	F	H
	nCF ₃	C_nH_{2n+1}	CF ₃	H	H	H
	nCF ₃ .F	C_nH_{2n+1}	CF ₃	F	H	H
	nCF ₃ .F.F	C_nH_{2n+1}	CF ₃	F	F	H
25	nOCF ₃	C_nH_{2n+1}	OCF ₃	H	H	H
	nOCF ₃ .F	C_nH_{2n+1}	OCF ₃	F	H	H
	nOCF ₃ .F.F	C_nH_{2n+1}	OCF ₃	F	F	H
	nOCF ₂	C_nH_{2n+1}	OCHF ₂	H	H	H
30	nOCF ₂ .F	C_nH_{2n+1}	OCHF ₂	F	H	H
	nOCF ₂ .F.F	C_nH_{2n+1}	OCHF ₂	F	F	H
	nS	C_nH_{2n+1}	NCS	H	H	H
	nS.F	C_nH_{2n+1}	NCS	F	H	H
35	nS.F.F	C_nH_{2n+1}	NCS	F	F	H
	rVsN	$C_rH_{2r+1}-CH=CH-C_sH_{2s}-$	CN	H	H	H
	rEsN	$C_rH_{2r+1}-O-C_sH_{2s}-$	CN	H	H	H

Table A

5	<p>PCH</p>	<p>EPCH</p>
10	<p>BCH</p>	<p>CCP</p>
15	<p>CECP</p>	<p>ECCP</p>
20	<p>BECH</p>	<p>EBCH</p>
25	<p>PTP</p>	<p>CPTP</p>
30		
35	<p>CEPTP</p>	





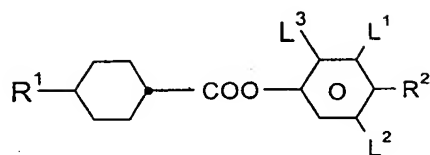
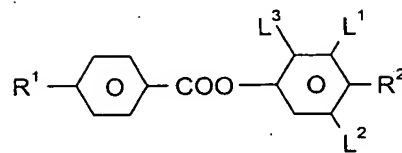
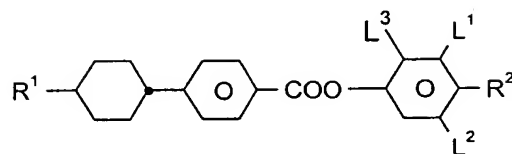
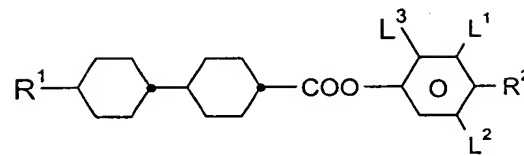
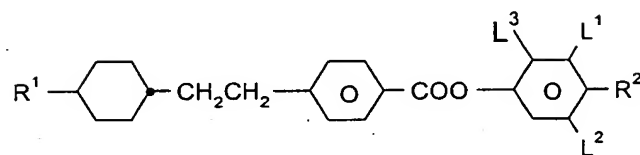
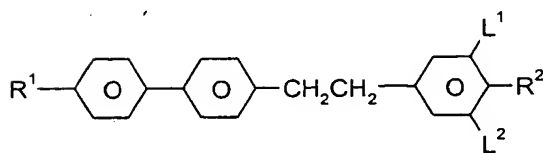
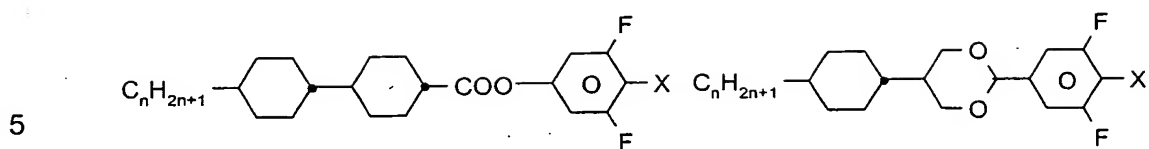
**CCH****PDX****PYP****PYRP****D****ME****HP****CP****EHP****ET**

Table B:**CCZU-n-X**(X = F, Cl or OCF₃)**CDU-n-X**(X = F, Cl or OCF₃)

10

C_nH_{2n+1} —[1,4-diphenylene]—CN

C_nH_{2n+1} -O—[1,4-diphenylene]—CN

K3·n**M3·n**

15

C_nH_{2n+1} —[cyclohexane]—CH₂CH₂—[1,4-phenylene]—CN

C_nH_{2n+1} —[1,4-phenylene]—[1,4-phenylene]—[1,4-phenylene]—CN

G3·n**T3·n**

20

C_nH_{2n+1} —[cyclohexane]—C₂H₄—[1,4-phenylene]—[1,3-difluoro-5-C_mH_{2m+1}-benzene]

Inm

25

C_nH_{2n+1} —[cyclohexane]—[1,3-difluoro-5-X-benzene]—[1,4-phenylene]

C_nH_{2n+1} —[cyclohexane]—[1,3-difluoro-5-X-benzene]—[1,3-difluoro-5-X-benzene]



BCH-n.FX(X = F, Cl or OCF₃)**CGU-n-X**(X = F, Cl or OCF₃)

30



C_nH_{2n+1} —[cyclohexane]—[cyclohexane]—OCC-C_mH_{2m+1}

C-nm


35

**CB15****C15**


5

**CCN-nm****NCB-nm**



10

**CCEPC-nm**


15

**CCPC-nm**


20

**CH-nm**

25

HD-nm**HH-nm**


30

**OS-nm**


35




T00221-2252201

**CHE**


5

**BCH-nmF**


10

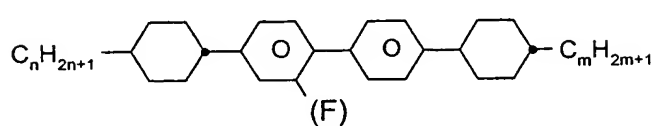**CBC-nm(F)**



15

**ECBC-nm**



20

**ECCH-nm****CCH-n1Em**


25

**T-nFX****B-nO.FX**(X = F, Cl or OCF₃)(X = F, Cl or OCF₃)


30

**PGIGI-n-X****GGP-n-X**(X = F, Cl or OCF₃)(X = F, Cl or OCF₃)


35

**CVCC-n-m**


5

**CVCP-n-m**


10

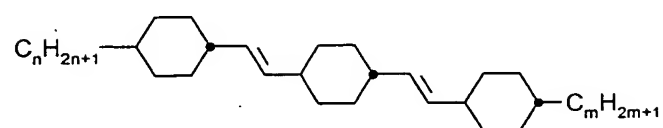**CVCVC-n-m**


15

**CP-V-N**


20

**CCG-V-F**

25


**CCP-V-n**

30


**CCP-Vn-m**

35


1002253 12001

**CPP-V-m**


5

**CPP-nV-m**


10

**CPP-Vn-m**


15

**CC-n-V**


20

**CC-n-Vm**


25

**CC-n-mV**


30

**CC-V-V**

35


**CC-V-Vn**

35




CC-nV-Vm


5

CC-V-nV**CC-Vn-mV**


10

**CC-nV-Vm**


15

**PCH-n(O)mFF**


20

**CCP-n(O)mFF**


25

**CCY-nO-Om**


30

**CCY-VO-(O)m**


35




5

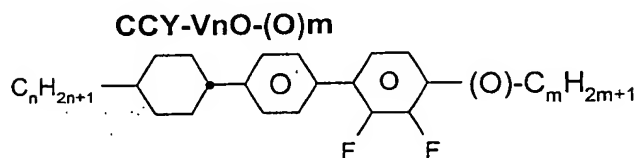


10

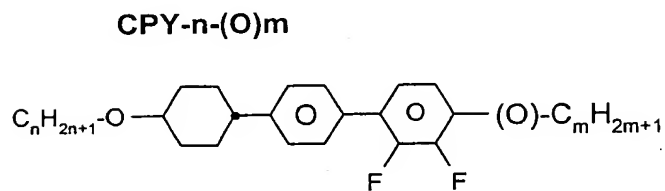


15

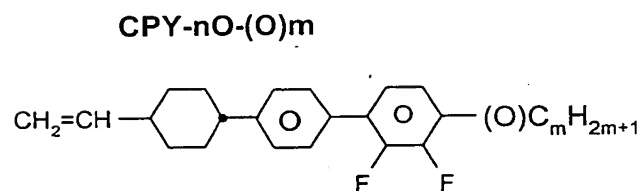


20

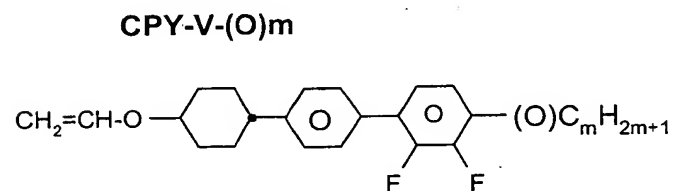

25

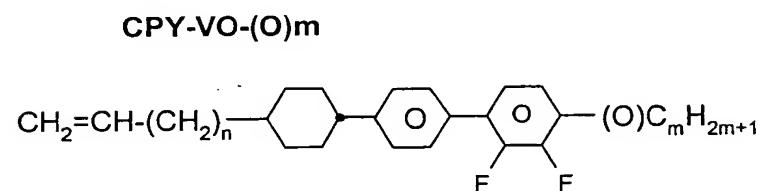


30

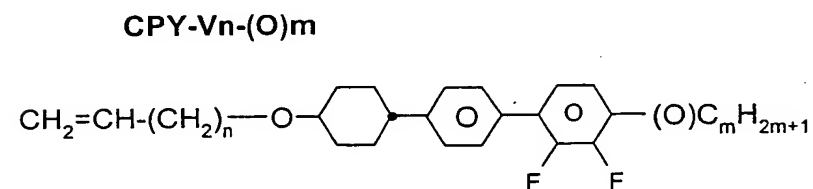


35






CLY-n-(O)m

5




CLY-nO-(O)m

10




CFY-n-(O)m

15




CFY-nO-(O)m

20




YY-n-(O)m

25



YY-nO-Om


30




CQY-n-(O)m

35


T00221" E26220T

**CCQY-n-(O)m**


5

**CPQIY-n-(O)m**

10

**CQPY-n-(O)m**

15

**PQPY-n-(O)m**

20

The following examples are intended to illustrate the invention without representing a limitation. Above and below, percentages are per cent by weight. All temperatures are indicated in degrees Celsius. Δn denotes optical anisotropy (589 nm, 20°C), $\Delta\epsilon$ denotes the dielectric anisotropy (1 kHz, 20°C), H.R. denotes the voltage holding ratio (at 100°C, after 5 minutes in the oven, 1 V), and V_0 , the threshold voltage, was determined at 20°C.

30

35

T00221 2252201

Example 1

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	CPQIY-3-O2	10.0	$T(N,I) = 105.5 \text{ }^{\circ}\text{C}$
	CPQIY-3-O4	10.0	$n_e(20^{\circ}\text{C}, 589 \text{ nm}) = 1.5822$
	CPQIY-5-O4	10.0	$\Delta n(20^{\circ}\text{C}, 589 \text{ nm}) = 0.1001$
10	PCH-304FF	9.0	$\epsilon_{\perp}(20^{\circ}\text{C}, 1 \text{ kHz}) = 8.3$
	PCH-504FF	9.0	$\Delta\epsilon(20^{\circ}\text{C}, 1 \text{ kHz}) = -4.6$
	CCP-202FF	4.0	$\gamma_1(20^{\circ}\text{C}) = 271 \text{ mPa}\cdot\text{s}$
	CCP-302FF	6.0	$t_{\text{store}}(-40^{\circ}\text{C}) > 1000 \text{ h}$
15	CCP-502FF	6.0	$\text{VHR}(5\text{min}, 100^{\circ}\text{C}) = 89 \text{ \%}$
	CCP-21FF	7.0	$V_0(20^{\circ}\text{C}) = 2.25 \text{ V}$
	CCP-31FF	10.0	
	CCP-V-1	9.0	
20	CC-3-V1	<u>10.0</u>	
	Σ	100.0	

The liquid-crystal medium is introduced into a VA display with TFT addressing. This display is distinguished, in particular, by the fact that it can be employed in a very large temperature range, as required for so-called broad range applications, for example in mobile telephones and in navigation systems.

Example 2

	Compound/ abbreviation	Concentration / % by weight	Physical properties		
5	CPQIY-3-O2	10.0	T(N,I)	= 71.5	°C
	CPQIY-3-O4	6.0	$n_e(20^\circ\text{C}, 589\text{ nm})$	= 1.5773	
	CPQIY-5-O4	8.0	$\Delta n(20^\circ\text{C}, 589\text{ nm})$	= 0.0947	
10	D-302FF	20.0	$\epsilon_\perp(20^\circ\text{C}, 1\text{ kHz})$	= 11.7	
	D-502FF	20.0	$\Delta\epsilon(20^\circ\text{C}, 1\text{ kHz})$	= -7.5	
	PCH-502FF	14.0	$\gamma_1(20^\circ\text{C})$	= 268	mPa·s
	PCH-504FF	11.0	$t_{\text{store}}(-20^\circ\text{C})$	> 1000	h
15	CCP-302FF	5.0	$t_{\text{store}}(-40^\circ\text{C})$	≥ 500	h
	CCP-502FF	6.0	$V_0(20^\circ\text{C})$	= 1.45	V
	Σ	100.0			

20 As in Example 1, the liquid-crystal medium is introduced into a display having TFT addressing, but here into an IPS display. This display is distinguished, in particular, by a very low addressing voltage.

25

30

35

Example 3

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	CPQIY-3-O4	8.0	$T(N,I) = 71.0 \text{ }^{\circ}\text{C}$
	CPQIY-5-O4	8.0	$n_e(20^{\circ}\text{C}, 589 \text{ nm}) = 1.5788$
	CCQY-5-O2	5.3	$\Delta n(20^{\circ}\text{C}, 589 \text{ nm}) = 0.1007$
10	PCH-304FF	19.0	$\varepsilon_{\perp}(20^{\circ}\text{C}, 1 \text{ kHz}) = 8.5$
	PCH-502FF	9.0	$\Delta\varepsilon(20^{\circ}\text{C}, 1 \text{ kHz}) = -4.4$
	PCH-504FF	14.0	$\gamma_1(20^{\circ}\text{C}) = 219 \text{ mPa}\cdot\text{s}$
	CCP-302FF	13.7	$k_1(20^{\circ}\text{C}) = 11.8 \text{ pN}$
15	BCH-32	8.0	$k_1/k_3(20^{\circ}\text{C}) = 1.24$
	CC-5-V	3.0	$t_{\text{store}}(-30^{\circ}\text{C}) > 1000 \text{ h}$
	CC-3-V1	8.0	$t_{\text{store}}(-40^{\circ}\text{C}) > 1000 \text{ h}$
	PGIGI-3-F	4.0	$V_0(20^{\circ}\text{C}) = 1.92 \text{ V}$
20	Σ	100.0	

As in Example 1, the liquid-crystal-medium is introduced into a VA display with TFT addressing.

Example 4

	Compound/ abbreviation	Concentration / % by weight	Physical properties	
5	CCQY-5-O2	7.0	$T(N,I)$	= 99.0 °C
	PCH-304FF	12.0	$n_e(20^\circ\text{C}, 589\text{ nm})$	= 1.5825
	PCH-502FF	9.0	$\Delta n(20^\circ\text{C}, 589\text{ nm})$	= 0.1003
10	PCH-504FF	13.0	$\varepsilon_\perp(20^\circ\text{C}, 1\text{ kHz})$	= 8.1
	CCP-302FF	11.0	$\Delta\varepsilon(20^\circ\text{C}, 1\text{ kHz})$	= -4.4
	CCP-502FF	9.0	$\gamma_1(20^\circ\text{C})$	= 266 mPa·s
	CCP-21FF	7.0	$k_1(20^\circ\text{C})$	= 16.7 pN
15	CCP-31FF	11.0	$k_1/k_3(20^\circ\text{C})$	= 1.13
	BCH-32	8.0	$t_{\text{store}}(-30^\circ\text{C})$	> 1000 h
	CCP-V-1	10.0	$t_{\text{store}}(-40^\circ\text{C})$	≥ 300 h
	CC-3-V1	3.0	$V_0(20^\circ\text{C})$	= 2.21 V
20	Σ	100.0		

As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display is distinguished, in particular, by the fact that it can be employed in a very large temperature range, as required for so-called broad range applications, for example in mobile telephones and in navigation systems.

Example 5

	Compound/ abbreviation	Concentration / % by weight	Physical properties		
5	CPQIY-3-O4	10.0	T(N,I)	= 70.5	°C
	CPQIY-5-O4	10.0	$n_e(20^\circ\text{C}, 589\text{ nm})$	= 1.5785	
	PCH-304FF	17.0	$\Delta n(20^\circ\text{C}, 589\text{ nm})$	= 0.0993	
10	PCH-502FF	9.0	$\varepsilon_\perp(20^\circ\text{C}, 1\text{ kHz})$	= 8.1	
	PCH-504FF	14.0	$\Delta\varepsilon(20^\circ\text{C}, 1\text{ kHz})$	= -4.2	
	CPY-2-O2	7.0	$\gamma_1(20^\circ\text{C})$	= 187	mPa·s
	CPY-3-O2	7.0	$k_1(20^\circ\text{C})$	= 11.5	pN
15	CCP-V-1	12.0	$k_1/k_3(20^\circ\text{C})$	= 1.24	
	CCH-35	5.0	$t_{\text{store}}(-30^\circ\text{C})$	> 1000	h
	CC-3-V1	9.0	$t_{\text{store}}(-40^\circ\text{C})$	≥ 300	h
	Σ	100.0	$V_0(20^\circ\text{C})$	= 1.95	V

As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing.

Example 6

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	PQPY-5-O4	14.0	$T(N,I) = 71.0 \text{ } ^\circ\text{C}$
	PCH-304FF	16.0	$n_e(20^\circ\text{C}, 589 \text{ nm}) = 1.5812$
	PCH-502FF	12.0	$\Delta n(20^\circ\text{C}, 589 \text{ nm}) = 0.1023$
10	PCH-504FF	3.0	$\varepsilon_\perp(20^\circ\text{C}, 1 \text{ kHz}) = 6.9$
	CPY-2-O2	7.0	$\Delta\varepsilon(20^\circ\text{C}, 1 \text{ kHz}) = -3.3$
	CPY-3-O2	7.0	$\gamma_1(20^\circ\text{C}) = 108 \text{ mPa}\cdot\text{s}$
	CCP-V-1	4.0	$t_{\text{store}}(-30^\circ\text{C}) > 1000 \text{ h}$
15	BCH-32	7.0	$t_{\text{store}}(-40^\circ\text{C}) > 1000 \text{ h}$
	CCH-35	5.0	$V_0(20^\circ\text{C}) = 2.10 \text{ V}$
	CC-3-V	4.0	
	CC-5-V	11.0	
20	CC-3-V1	<u>10.0</u>	
	Σ	100.0	

As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display exhibits, in particular, very short response times.

Example 7

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	PQPY-5-1	10.0	$T(N,I) = 72.0 \text{ } ^\circ\text{C}$
	PCH-304FF	18.0	$n_e(20^\circ\text{C}, 589 \text{ nm}) = 1.5890$
	PCH-502FF	12.0	$\Delta n(20^\circ\text{C}, 589 \text{ nm}) = 0.1054$
10	PCH-504FF	4.0	$\varepsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz}) = 6.9$
	CCP-31FF	6.0	$\Delta\varepsilon(20^\circ\text{C}, 1 \text{ kHz}) = -3.3$
	CPY-2-O2	4.0	$\gamma_1(20^\circ\text{C}) = 112 \text{ mPa}\cdot\text{s}$
	CPY-V-O2	10.0	$t_{\text{store}}(-30^\circ\text{C}) > 1000 \text{ h}$
15	CCP-V-1	7.0	$t_{\text{store}}(-40^\circ\text{C}) > 1000 \text{ h}$
	CCP-V2-1	3.0	$V_0(20^\circ\text{C}) = 2.14 \text{ V}$
	BCH-32	6.0	
	CC-3-V	9.0	
20	CC-3-2V	6.0	
	CC-3-V1	5.0	
	Σ	100.0	

25 As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display exhibits, in particular, very short response times.

30

35

T00252-12001

Example 8

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	PQPY-5-O2	20.0	$T(N,I) = 86.5 \text{ }^{\circ}\text{C}$
	PCH-304FF	14.0	$n_e(20^{\circ}\text{C}, 589 \text{ nm}) = 1.5930$
	PCH-502FF	10.0	$\Delta n(20^{\circ}\text{C}, 589 \text{ nm}) = 0.1109$
10	PCH-504FF	13.0	$\epsilon_{\perp}(20^{\circ}\text{C}, 1 \text{ kHz}) = 9.0$
	CCP-302FF	9.0	$\Delta\epsilon(20^{\circ}\text{C}, 1 \text{ kHz}) = -5.1$
	CCP-502FF	8.0	$\gamma_1(20^{\circ}\text{C}) = 239 \text{ mPa}\cdot\text{s}$
	CCP-21FF	3.0	$t_{\text{store}}(-20^{\circ}\text{C}) > 1000 \text{ h}$
15	CCP-31FF	6.0	$t_{\text{store}}(-30^{\circ}\text{C}) \geq 900 \text{ h}$
	BCH-32	6.0	$t_{\text{store}}(-40^{\circ}\text{C}) \geq 600 \text{ h}$
	CCP-V-1	7.0	$V_0(20^{\circ}\text{C}) = 1.90 \text{ V}$
	CC-3-V1	<u>5.0</u>	
20	Σ	100.0	

As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display is distinguished, in particular, by the fact that it can be employed in a large temperature range and a low addressing voltage is required.

Example 9

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	CQPY-5-O2	11.0	$T(N,I) = 86.5 \text{ }^{\circ}\text{C}$
	PCH-304FF	13.0	$n_e(20^{\circ}\text{C}, 589 \text{ nm}) = 1.5971$
	PCH-502FF	12.0	$\Delta n(20^{\circ}\text{C}, 589 \text{ nm}) = 0.1080$
10	PCH-504FF	16.0	$\epsilon_{\perp}(20^{\circ}\text{C}, 1 \text{ kHz}) = 9.0$
	CCP-302FF	12.0	$\Delta\epsilon(20^{\circ}\text{C}, 1 \text{ kHz}) = -5.2$
	CCP-502FF	13.0	$\gamma_1(20^{\circ}\text{C}) = 262 \text{ mPa}\cdot\text{s}$
	CCP-21FF	8.0	$t_{\text{store}}(-20^{\circ}\text{C}) > 1000 \text{ h}$
15	BCH-32	8.0	$t_{\text{store}}(-30^{\circ}\text{C}) \geq 800 \text{ h}$
	CCP-V-1	4.0	$t_{\text{store}}(-40^{\circ}\text{C}) \geq 500 \text{ h}$
	PGIGI-3-F	<u>3.0</u>	$V_0(20^{\circ}\text{C}) = 1.90 \text{ V}$
	Σ	100.0	

As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display is distinguished, in particular, by the fact that it can be employed in a large temperature range.

Example 10

	Compound/ abbreviation	Concentration / % by weight	Physical properties		
5	CQY-5-O2	12.0	T(N,I)	= 70	°C
	PCH-304FF	18.0	$n_e(20^\circ\text{C}, 589\text{ nm})$	= 1.5850	
	PCH-502FF	9, 0	$\Delta n(20^\circ\text{C}, 589\text{ nm})$	= 0.1011	
10	CPY-2-O3	13.0	$\varepsilon_{\perp}(20^\circ\text{C}, 1\text{ kHz})$	= 6.9	
	CPY-3-O3	13.0	$\Delta\varepsilon(20^\circ\text{C}, 1\text{ kHz})$	= -3.3	
	BCH-32	6.0	$\gamma_1(20^\circ\text{C})$	= 115	mPa·s
	CCP-V-1	2.0	$t_{\text{store}}(-40^\circ\text{C})$	> 1000	h
15	CC-5-V	18.0	$V_0(20^\circ\text{C})$	= 2.10	V
	CC-3-V1	9.0			
	Σ	100.0			

20 As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display is distinguished, in particular, by very short response times.

25

30

35

T00221-2252001

Example 11

	Compound/ abbreviation	Concentration / % by weight	Physical properties
5	CQY-5-O2	13.0	$T(N,I) = 71.0 \text{ }^{\circ}\text{C}$
	PCH-304FF	10.0	$\Delta n (20^{\circ}\text{C}, 589 \text{ nm}) = 0.0792$
	PCH-502FF	13.0	$\epsilon_{\perp} (20^{\circ}\text{C}, 1 \text{ kHz}) = 8.0$
10	PCH-504FF	14.0	$\Delta \epsilon (20^{\circ}\text{C}, 1 \text{ kHz}) = -4.2$
	CCP-302FF	11.0	$\gamma_1 (20^{\circ}\text{C}) = 140 \text{ mPa}\cdot\text{s}$
	CCP-502FF	14.0	$V_0 (20^{\circ}\text{C}) = 2.0 \text{ V}$
	CCH-35	8.0	
15	CC-3-V1	9.0	
	CC-5-V	5.0	
	CCP-V1	<u>3.0</u>	
	Σ	100.0	

20

As in Example 1, the liquid-crystal medium is introduced into a VA display with TFT addressing. This display is distinguished, in particular, by very short response times.

25

The liquid-crystal mixtures of Examples 1 and 3 to 11 can also be used with good results in IPS displays.

30

35

T00221 "E25222001